


FJ SIDEBOARD


Unpacking and moving instructions

1. A) Unscrew the screws on the front of the packaging (where the address label is placed)

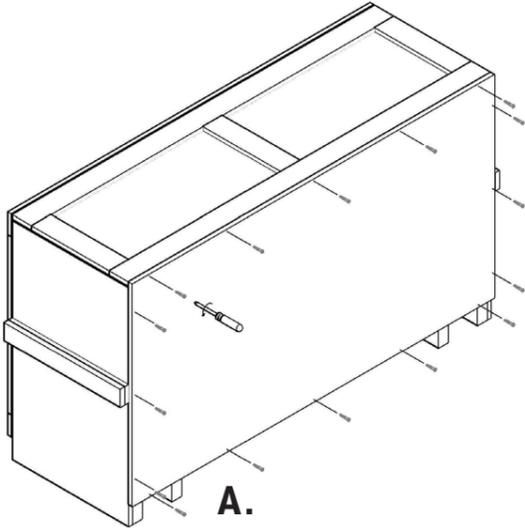


2. B) Remove the front of the packaging
C) Unscrew the screws on one end of the packaging

IMPORTANT: DO NOT TRY TO DRAG THE FJ SIDEBOARD OUT OF THE PACKAGING.

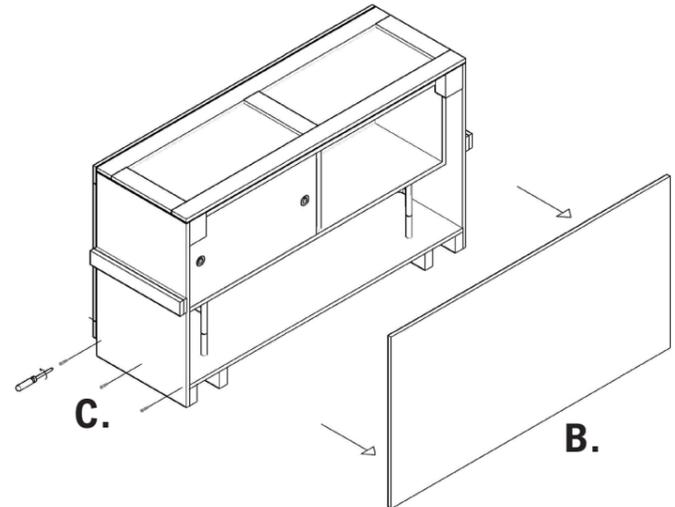


3. D) Unscrew the screws at the other end of the packaging
E) Unscrew the screws in the bottom on the back of the FJ Sideboard packaging

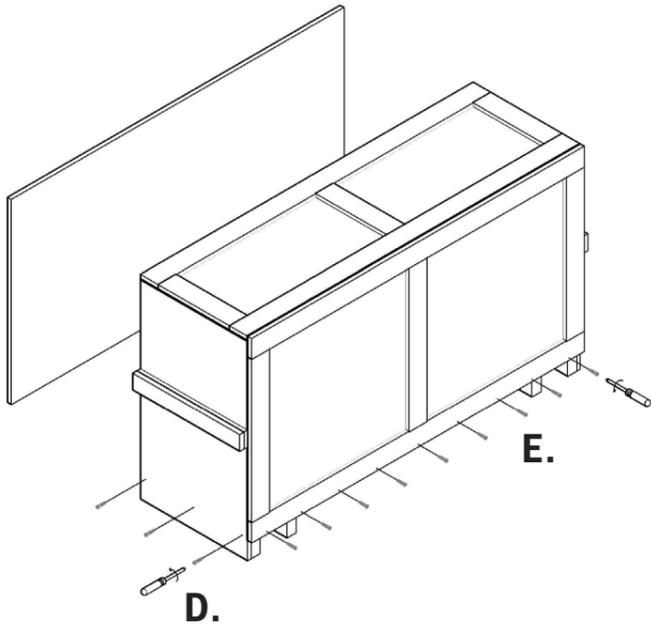

4. F) Carefully slide the packaging away from the FJ Sideboard


IMPORTANT: DO NOT UNLOCK THE SLIDING BOLT THAT LOCKS THE SLIDING DOORS AND DO NOT REMOVE THE FOAM THAT SECURE THE DRAWERS BEFORE THE FJ SIDEBOARD IS PLACED AT ITS FINAL DESTINATION.

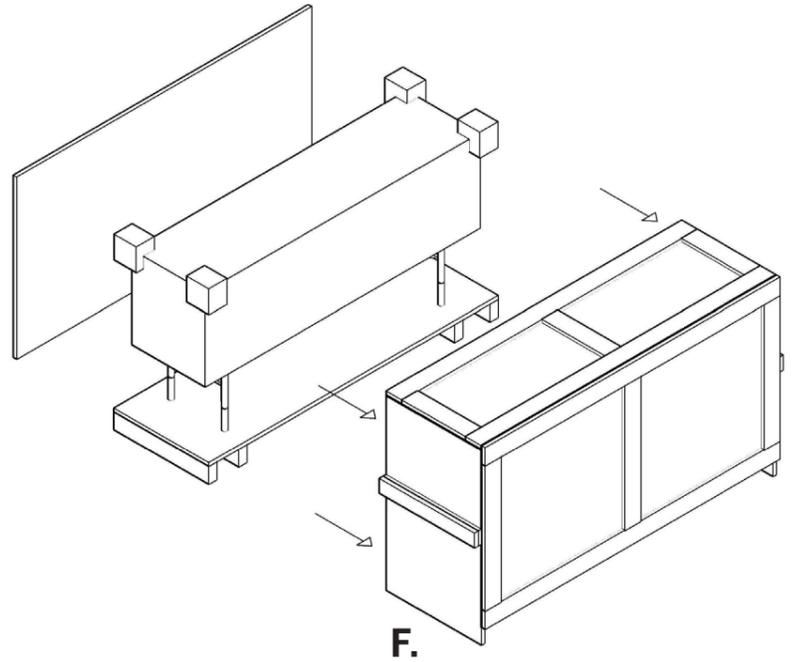

5. HOW TO LEVEL THE FJ SIDEBOARD:

Once the FJ Sideboard is placed at its final destination it has to be leveled using the adjustment screws (G). It is important that you level the FJ Sideboard in both the length and the width.

IMPORTANT: IF THE SIDEBOARD IS NOT LEVELED PRECISELY IT WILL AFFECT THE FUNCTION OF THE SLIDING DOORS.

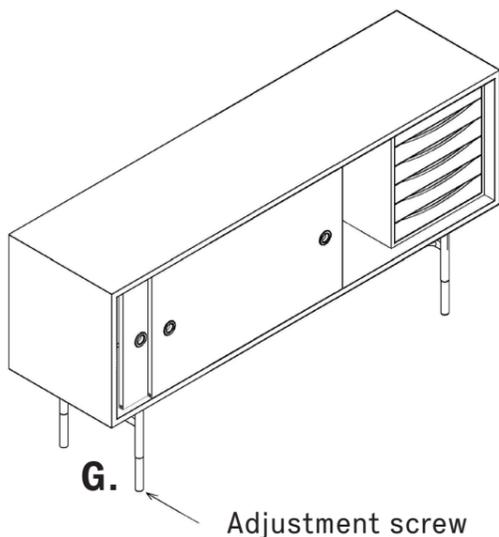

6. HOW TO MOVE THE FJ SIDEBOARD:

IMPORTANT: BEFORE MOVING THE FJ SIDEBOARD IT IS VERY IMPORTANT THAT YOU ALWAYS LOCK AND SECURE THE SLIDING DOORS BY SLIDING THE RIGHT SLIDING DOOR TO THE LEFT AND LOCK BOTH DOORS WITH THE SLIDING BOLT WHICH IS PLACED INSIDE THE FJ SIDEBOARD.

